

LED
TECHNOLOGY

50,000 Hours Life, 24/36Watt, 120/277VAC

Applications:

Ceiling, T-Bar Drop Ceiling, Troffer Replacement




Features:

- Adjustable Watt 24W or 36W
- Adjustable Lamp Color 4000K Cool White or 5000K Day Light
- Instant On LED
- 10% 0-10V Dimming
- Low Profile Design.
- Non-Corrosive Powder Coated Steel Body.
- Includes Earth Quake Clips
- Can be Installed with Backup Batteries. (Sold Separately)
- Accessory Surface Mount Frame Available



Specification:

Input Line Voltage:	120/277VAC
Input Power:	24/36W
Input Line Frequency:	50/60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C
Maximum Operating Temp:	40°C
CCT:	4000K/5000K
CRI:	≥80
Lumens:	3000/4500
CBCP:	1059/1485
Power Factor:	> 0.90
THD:	10%
Dimmable:	10% 0~10V

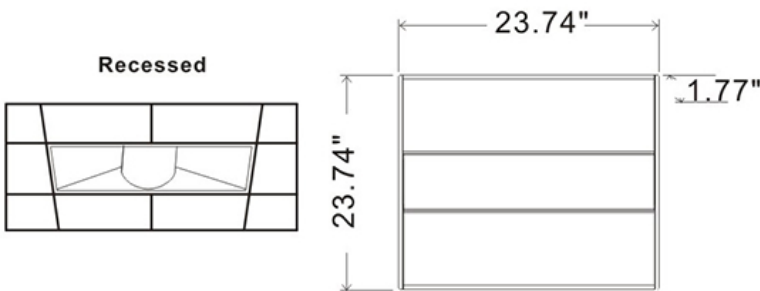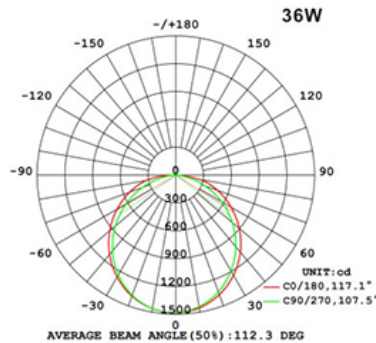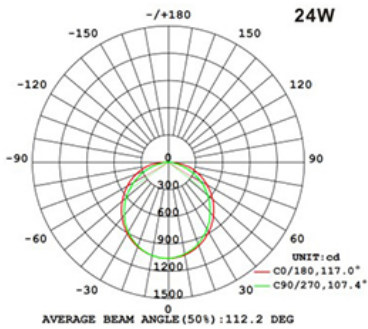

Height	24W Eavg, Emax	24W Diameter	36W Eavg, Emax	36W Diameter
3.281ft	32.35, 98.40fc	8.948ft	45.38, 137.96fc	8.935ft
1m	348.2, 1059lx	272.73cm	488.4, 1485lx	272.33cm
6.562ft	8.086, 24.60fc	17.89ft	11.34, 34.48fc	17.87ft
2m	87.04, 264.8lx	545.46cm	122.1, 371.2lx	544.66cm
9.843ft	3.594, 10.93fc	26.84ft	5.042, 15.33fc	26.8ft
3m	38.49, 117.7lx	818.19cm	54.27, 165.0lx	816.99cm
13.12ft	2.022, 6.150fc	35.78ft	2.836, 8.621fc	35.74ft
4m	21.76, 66.20lx	1090.92cm	30.53, 92.80lx	1089.32cm
16.4ft	1.294, 3.936fc	44.74ft	1.815, 5.517fc	44.67ft
5m	13.93, 42.37lx	1363.65cm	19.54, 59.39lx	1361.66cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY
5-YEAR *

Model:#	Description	wattage	lumens
CL3SID22-CCT	24/36 Watt LED Direct/Indirect Troffer 4000K Cool White/ 5000K Day Light	24/36W	3000/4500

* 5 Year Limited Warranty

UPC: 80680215588-3

