CYBER TECH LIGHTING INC.
www.cybertechlighting.com

12" Wide Surface Mounted Slim LED Panel Light

LED TECHNOLOGY

50,000 Hours Life, 40/30/20Watt, 120-277VAC

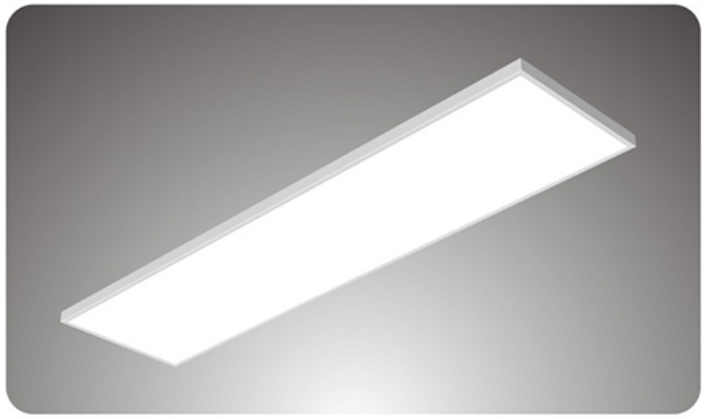

Applications:

Surface Mount on Ceiling or T-Bar Drop Ceiling

Surface Mount

Recessed



ADJUSTABLE LIGHT COLOR

- 2700K SOFT WARM WHITE
- 3000K WARM WHITE
- 3500K BRIGHT WARM WHITE
- 4000K COOL WHITE
- 5000K DAY LIGHT

ADJUSTABLE WATT

40 WATTS	3600 LUMENS
30 WATTS	2700 LUMENS
20 WATTS	1800 LUMENS

Specification:

Input Line Voltage:	120-277VAC
Input Power	40/30/20W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C
Adjustable CCT	2700K/3000K/3500K/4000K/5000K
CRI	≥80
Lumens	3600/2700/1800
Power Factor	>0.90
THD	20%
Dimmable	Standard Triac Dimmer

Features:

- Adjustable 5CCT 2700K, 3000K, 3500K, 4000K, 5000K
- Instant on LED
- Replaces 1x4 Ft Lamp Fluorescent Troffer or Wrap
- Long Life 50,000 Hours
- White Framed Edge
- Triac Dimming
- Surface Mounted 1-1/6" Thick

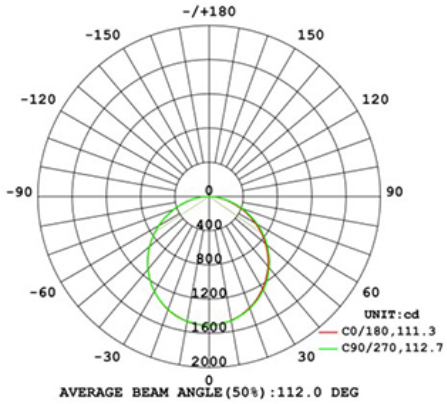

AVERAGE BEAM ANGLE(50%):112.0 DEG

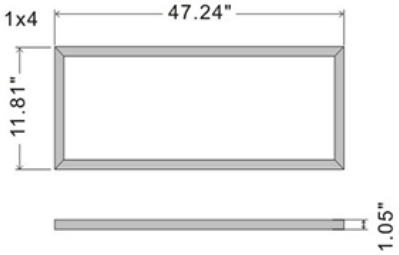

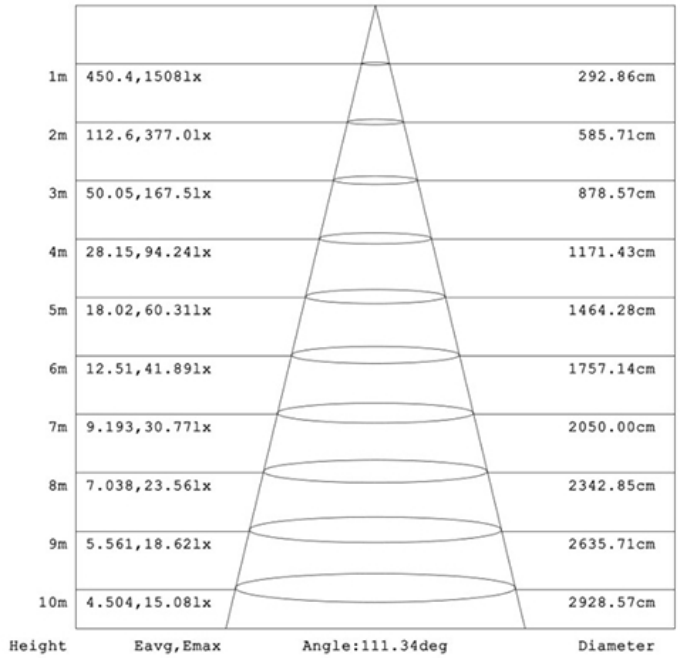

1m	450.4,15081x	292.86cm
2m	112.6,377.01x	585.71cm
3m	50.05,167.51x	878.57cm
4m	28.15,94.241x	1171.43cm
5m	18.02,60.311x	1464.28cm
6m	12.51,41.891x	1757.14cm
7m	9.193,30.771x	2050.00cm
8m	7.038,23.561x	2342.85cm
9m	5.561,18.621x	2635.71cm
10m	4.504,15.081x	2928.57cm

Height | Eavg,Emax | Angle:111.34deg | Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Weight: 11.46 lb

WARRANTY
2-YEAR *

Model:#	Description	wattage	lumens
CL40SMP14D-CCT	40 Watt LED Surface Mounted Panel 12"W x 4'L Adjustable 5CCT and Watt	40/30/20W	3600/2700/1800

* 2 Years Limited Warranty

UPC: 74616080007-3

Cyber Tech Lighting,Inc.
331 S. Hale Ave. Fullerton , CA 92831 USA.
Tel:714-870-0794, 1-877-60CYBER Fax:714-870-0795
www.cybertechlighting.com

Intertek

CL19-0624