

LED
TECHNOLOGY

50,000 Hours Life, 40/30/20Watt, 120-277VAC

Applications:

Surface Mount on Ceiling or T-Bar Drop Ceiling

Surface Mount



Recessed



Features:

- Adjustable 5CCT 2700K, 3000K, 3500K, 4000K, 5000K
- Instant on LED
- Replaces 1x4 Ft Lamp Fluorescent Troffer or Wrap
- Long Life 50,000 Hours
- White Framed Edge
- Triac Dimming
- Surface Mounted 1-1/8" Thick

ADJUSTABLE LIGHT COLOR

2700K SOFT WARM WHITE
3000K WARM WHITE
3500K BRIGHT WARM WHITE
4000K COOL WHITE
5000K DAY LIGHT



ADJUSTABLE WATT

40 WATTS	3600 LUMENS
30 WATTS	2700 LUMENS
20 WATTS	1800 LUMENS



Specification:

Input Line Voltage:	120-277VAC
Input Power	40/30/20W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C
Adjustable CCT	2700K/3000K/3500K/4000K/5000K
CRI	≥80
Lumens	3600/2700/1800
Power Factor	>0.90
THD	20%
Dimmable	Standard Triac Dimmer

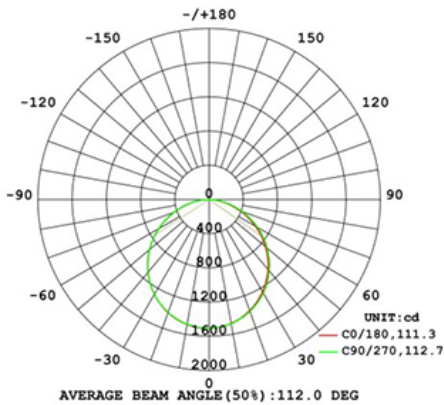

Weight: 11.46 lb


WARRANTY

2-YEAR *

Model:#	Description	wattage	lumens
CL40SMP14D-CCT	40 Watt LED Surface Mounted Panel 12"W x 4'L Adjustable 5CCT and Watt	40/30/20W	3600/2700/1800

* 2 Years Limited Warranty

UPC: 74616080007-3

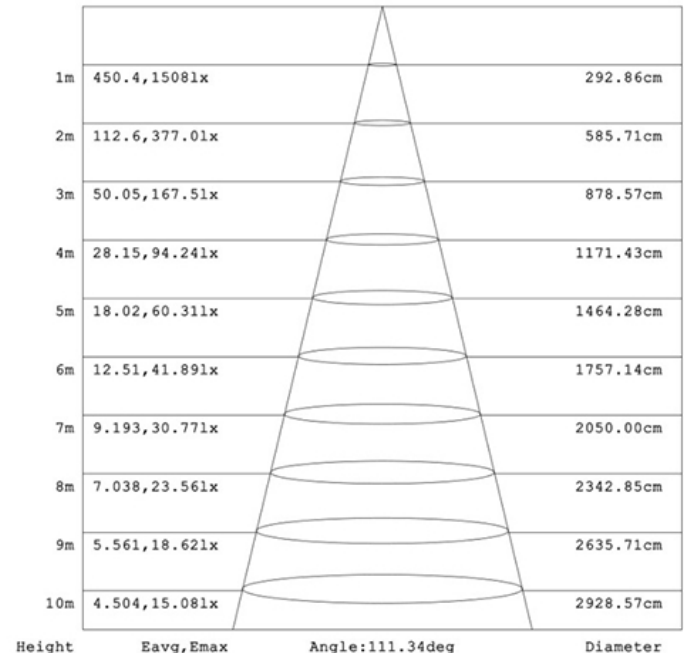

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.