

**LED**  
TECHNOLOGY




50,000 Hours Life, 36/42/50Watt, 120-277VAC

### Applications:

Ceiling, T-Bar Drop Ceiling, Troffer Replacement


### Features:

- Adjustable Watt 36W, 42W or 50W
- Adjustable Lamp Color 3500K Warm White, 4000K Cool White or 5000K Day Light
- Instant On LED
- 10% 0-10V Dimming
- Low Profile Design.
- Non-Corrosive Powder Coated Steel Body.
- Includes Earth Quake Clips
- Can be Installed with Backup Batteries. (Sold Separately)
- Accessory Surface Mount Frame Available

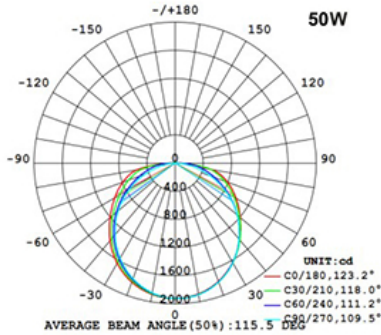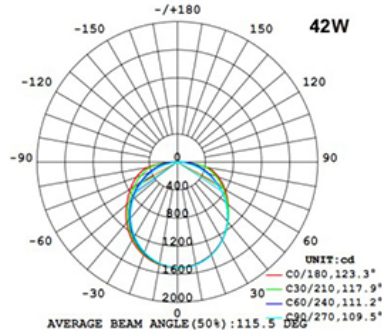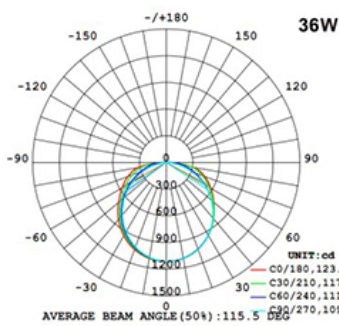

### Specification:

Input Line Voltage:	120-277VAC
Input Power:	36/42/50W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C
Maximum Operating Temp:	40°C
CCT:	3500K/4000K/5000K
CRI:	≥80
Lumens:	4500/5250/6250
CBCP:	1114/1509/1925
Power Factor:	>0.90
THD:	10%
Dimmable:	10% 0~10V

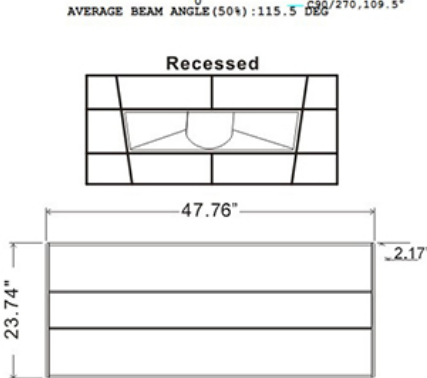

**36W**

Height	Avg, Emax	Angle: 109.50deg	Diameter
3.281ft	32.69, 103.6fc		9.285ft
1m	351.8, 11151x		283.01cm
6.562ft	8.172, 25.89fc		18.57ft
2m	87.96, 278.71x		566.02cm
9.843ft	3.432, 11.51fc		27.86ft
3m	39.09, 123.91x		849.03cm
13.12ft	2.943, 6.473fc		37.14ft
4m	21.99, 69.671x		1132.04cm
16.4ft	1.307, 4.143fc		46.43ft
5m	14.07, 44.591x		1415.05cm

**42W**

Height	Avg, Emax	Angle: 109.50deg	Diameter
3.281ft	44.25, 140.2fc		9.285ft
1m	476.3, 15091x		283.01cm
6.562ft	11.06, 35.04fc		18.57ft
2m	119.1, 377.21x		566.02cm
9.843ft	4.917, 15.58fc		27.86ft
3m	52.92, 167.71x		849.03cm
13.12ft	2.766, 8.761fc		37.14ft
4m	29.77, 94.301x		1132.04cm
16.4ft	1.370, 5.607fc		46.43ft
5m	19.05, 60.351x		1415.05cm

**50W**

Height	Avg, Emax	Angle: 109.46deg	Diameter
3.281ft	56.45, 179.0fc		9.278ft
1m	607.6, 19271x		282.80cm
6.562ft	14.11, 44.75fc		18.56ft
2m	151.9, 481.71x		565.60cm
9.843ft	6.272, 19.89fc		27.83ft
3m	67.51, 214.11x		848.40cm
13.12ft	3.528, 11.19fc		37.11ft
4m	37.98, 120.41x		1131.21cm
16.4ft	2.258, 7.160fc		46.39ft
5m	24.30, 77.061x		1414.01cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**WARRANTY**

**5-YEAR \***

Model:#	Description	wattage	lumens
CL5SID24-CCT	36/42/50 Watt LED Direct/Indirect Troffer 3500K Warm/4000K Cool/ 5000K Day Light	36/42/50W	4500/5250/6250

\*5 Year Limited Warranty

UPC: 80680215589-0

Cyber Tech Lighting, Inc.  
331 S. Hale Ave. Fullerton, CA 92831 USA.  
Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795  
www.cybertechlighting.com

