


Features:

- 90-minute emergency operation
- Push-to-test switch and charge indicator
- Ni-Cad premium battery
- Field replaceable snap-in/out directional chevron
- Universal mount, ceiling or wall
- Snap fit construction speeds installation
- Suitable for damp locations
- Dual voltage 120/277V
- 5-year limited warranty

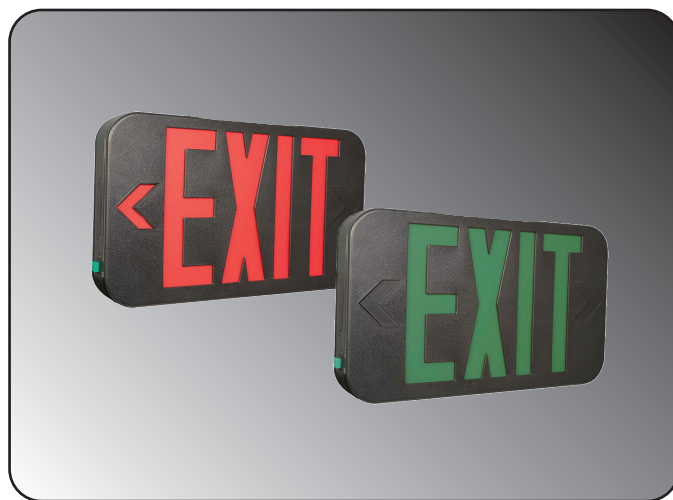

Specifications:

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 30°C

Specifications:

FHEX20B*EM _____ 12.6" x 8.2" x 4.3"



WARRANTY

5-YEAR*

Model #	Description	Wattage	Lumens
FHEX20BGEM	LED Exit Sign (Black/Green)	2	-
FHEX20BREM	LED Exit Sign (Black/Red)	2	-