

LED
TECHNOLOGY

50,000 Hours Life, 100/90/70Watt, 120-277VAC

Applications:


Commercial & Industrial High Bay Application

Features:

- Adjustable Wattage 100/90/70Watt
- Adjustable CCT 4000K&5000K
- Slim Design
- Non-Corrosive Powder Coated Steel Body
- Damp Location
- Steel Hanging Cable Included
- Dimmable down to 10%

Accessories Sold Separately:

Battery Backup



Add (BK) at end of model when ordering

Motion Sensor



ADJUSTABLE LIGHT COLOR



ADJUSTABLE WATT

100 WATTS	15,290 LUMENS
90 WATTS	12,510 LUMENS
70 WATTS	9,730 LUMENS




Specification:

Input Line Voltage:	120-277VAC
Input Power:	100/90/70W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-40°C
Maximum Operating Temp:	40°C
CCT:	4000K/5000K
CRI:	≥80
Lumens:	15290/12510/9730
CBCP:	6536
Power Factor:	>0.99
THD:	≥20%
Dimmable:	10% 0~10V


DRIVER: Constant-current LED power supply.

Luminous Intensity Distribution Curve

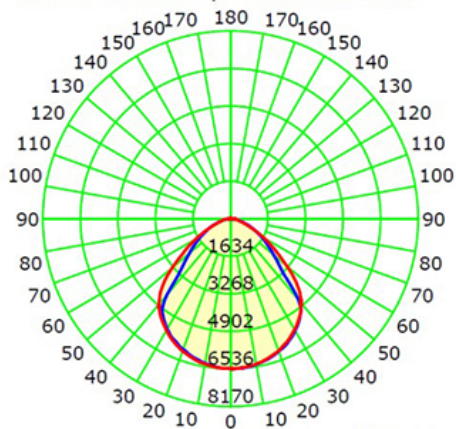

Average Diffuse Angle(50%): 93.9°

— C0-C180 — C90-C270



Height	Avg./Nadir. E	Beam Angle: 87.7°	Diameter / Area
1.0m	3301.58/ 6524.77lx		1.92m / 2.90sq.m
2.0m	825.40/ 1631.19lx		3.84m / 11.60sq.m
3.0m	366.84/ 724.97lx		5.76m / 26.10sq.m
4.0m	206.35/ 407.80lx		7.69m / 46.40sq.m
5.0m	132.06/ 260.99lx		9.61m / 72.50sq.m
6.0m	91.71/ 181.24lx		11.53m / 104.41sq.m
7.0m	67.38/ 133.16lx		13.45m / 142.11sq.m
8.0m	51.59/ 101.95lx		15.37m / 185.61sq.m
9.0m	40.76/ 80.55lx		17.29m / 234.92sq.m
10.0m	33.02/ 65.25lx		19.22m / 290.02sq.m

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY
5-YEAR *

Model:#	Description	wattage	lumens
HL110S/CCT	100 Watt LED Linear High Bay 2CCT	100W 90W 70W	15290 12510 9730

* 5 Year Limited Warranty

UPC: 80680215388-9

