

LED
TECHNOLOGY

50,000 Hours Life, 130Watt, 120-277VAC

Applications:

Commercial & Industrial High Bay Application

Features:

- Slim Design
- Non-Corrosive Powder Coated Steel Body
- Damp Location
- Steel Hanging Cable Included
- Dimmable down to 10%
- Accessories Sold Separately

Accessories:

Battery Backup




Add (BK) at end of model when ordering
Luminous Intensity Distribution Curve


Motion Sensor



Sold Separately HL-MS

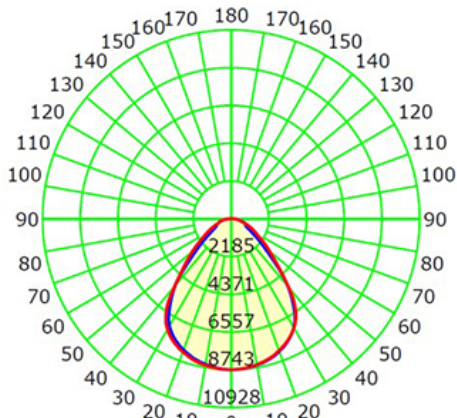

Unit: cd
Average Diffuse Angle(50%): 85.1°

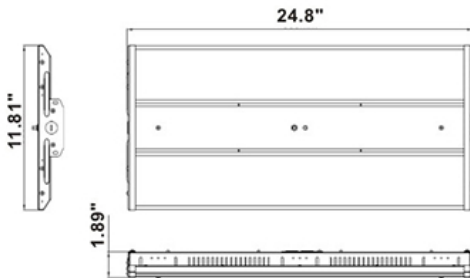

Specification:

Input Line Voltage:	120-277VAC
Input Power	130W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C
Maximum Operating Temp	40°C
CCT	5000K
CRI	≥80
Lumens	17,800
CBCP	8743
Power Factor	>0.90
THD	10%
Dimmable	10% 0~10V

DRIVER: Constant-current LED power supply.

Height	Avg./Nadir, E	Beam Angle:84.7°	Diameter / Area
1.0m	4424.63/ 8737.35lx		1.82m / 2.61sq.m
2.0m	1106.16/ 2184.34lx		3.64m / 10.43sq.m
3.0m	491.63/ 970.82lx		5.47m / 23.47sq.m
4.0m	276.54/ 546.08lx		7.29m / 41.72sq.m
5.0m	176.99/ 349.49lx		9.11m / 65.19sq.m
6.0m	122.91/ 242.70lx		10.93m / 93.87sq.m
7.0m	90.30/ 178.31lx		12.75m / 127.76sq.m
8.0m	69.13/ 136.52lx		14.58m / 166.87sq.m
9.0m	54.63/ 107.87lx		16.40m / 211.20sq.m
10.0m	44.25/ 87.37lx		18.22m / 260.74sq.m

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

5-YEAR *

Model:#

HL130S/850

Description

130 Watt LED Linear High Bay 5000K

wattage

130W

lumens

17800

* 5 Year Limited Warranty

UPC: 80680215584-5

Cyber Tech Lighting, Inc.

331 S. Hale Ave. Fullerton, CA 92831 USA.

Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795

www.cybertechlighting.com

