

LED TECHNOLOGY

**50,000 Hours Life, 240/220/200 Watt,
120/277VAC 60Hz**

Applications:

High Bay, Low Bay Lighting

Features:

- Adjustable 240/220/200W LED Replaces a 750/700/650W HID or MH Unit
- Aluminum Body
- 90 Degree Beam Angle
- 6Ft Power (Hardwire) Cord
- 0-10 Volt Dimmable (with motion sensor, sold separately)
- UL Listed
- Accessories Below Sold Separately

Accessories:

Battery Backup



Add (BK) at end of model when ordering

Screw on Motion Sensor




Add model# when ordering



Specification:

Input Line Voltage:	120/277VAC
Input Power Adjustable:	240/220/200W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C/-4°F
Maximum Operating Temp:	45°C/113°F
Adjustable CCT:	3500K/4000K/5000K
CRI:	≥80
Lumens:	33600/31240/29000
CBCP:	34106
Dimmable:	10% 0-10V

Luminous Intensity Distribution Curve

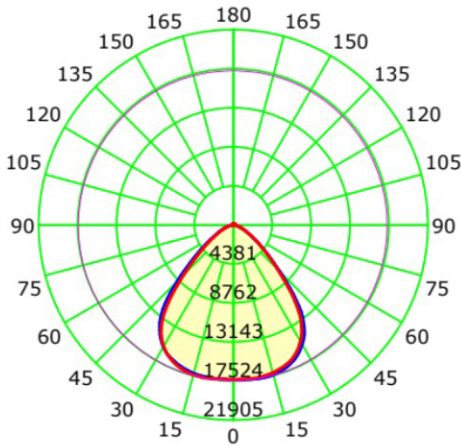


ADJUSTABLE LIGHT COLOR



Illuminance at a Distance(Beam Angle)

Dist(m)	Enadir(lx)	Dh/Dv	B(m)	S B(sq.m)	Eav_B(lx)
1.0	17358.90	1.95/1.87	2.8	4746.08	
2.0	4339.73	3.89/3.73	11.1	1186.52	
3.0	1928.77	5.84/5.60	25.0	527.34	
4.0	1084.93	7.79/7.47	44.5	296.63	
5.0	694.36	9.73/9.33	69.6	189.84	
6.0	482.19	11.68/11.20	100.2	131.84	
7.0	354.26	13.63/13.07	136.3	96.86	
8.0	271.23	15.57/14.93	178.1	74.16	
9.0	214.31	17.52/16.80	225.4	58.59	
10.0	173.59	19.47/18.66	278.3	47.46	

Dh Beam Angle(B): H88.5 V86.0 Field Angle(F): H126.3 V125.6

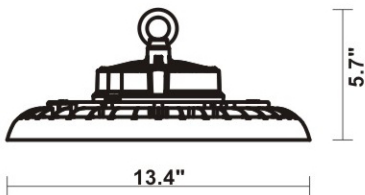

Weight:6.83lb

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

* 5-YEAR

Model:#	Description	wattage	lumens
HL240UFO/CCT	240Watt UFO High Bay LED Fixture Black Body, Adjustable 3CCT & Watt	240/220/200W	33600/31240/29000

* 5 Year Limited Warranty

UPC: 80680215595-1

