

LED
TECHNOLOGY


50,000 Hours Life, 9 Watt, 120VAC, 90CRI

Applications:


4" Recessed, Down Light with J-Box
Indoor And Outdoor Wet Locations Use

Features:

- Adjustable CCT 2700K, 3000K, 3500K, 4000K, and 5000K
- Replace Incandescent Save 80% Energy (65 Watt Equivalent)
- Rated Life of 50,000 Hr
- Smooth Dimming to 10%
- Dims on Most Standard Household Dimmers
- IC Rated
- Flicker Free
- High Efficacy 90CRI True Color
- Knockout for Romex or Flex Connection




Luminous Intensity Distribution Curve

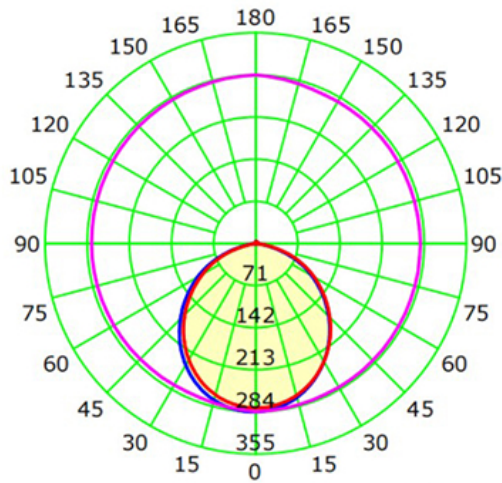


Average Diffuse Angle(50%): 106.2° Unit: cd

EASY INSTALLATION

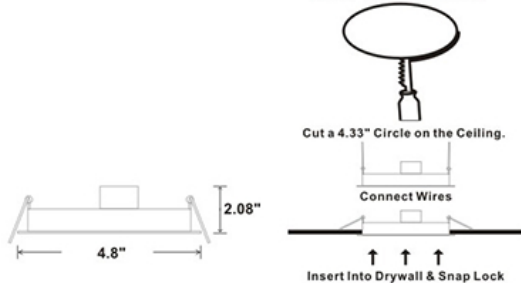

Specification:

Input Line Voltage:	120VAC
Input Power:	9W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C/-4°F
Maximum Operating Temp:	40°C/104°F
Adjustable CCT:	2700K/3000K/3500K/4000K/5000K
CRI:	≥90
Lumens:	700
Beam Angle:	110°
CBCP:	284
Dimmable:	Standard Triac Dimmer

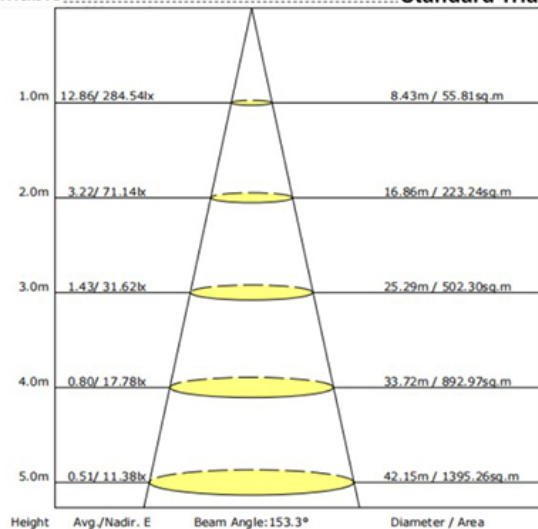

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY
2-YEAR*

Model:#	Description	wattage	lumens	Socket
LC10RT4-NCBX/CCT	4 Inch Dimmable, LED Can-Less Down Light With J-Box, 5CCT	9W	700	N/A
LC10RT4-NCBX/CCT/4PK	4 Inch Dimmable, LED Can-Less Down Light With J-Box, 5CCT, 4-Pack	9W	700	N/A

* 2 Year Limited Warranty

Wet Locations Rated This Luminaire is JA8 Compliant UPC

LC10RT4-NCBX/CCT: 80680215606-4
LC10RT4-NCBX/CCT/4pk: 74616080090-5

Cyber Tech Lighting, Inc.

331 S. Hale Ave. Fullerton, CA 92831 USA.

Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795

www.cybertechlighting.com

