

LED
TECHNOLOGY

50,000 Hours Life, 120/96/72 Watt, 120/277VAC 50/60Hz

Applications:

Parking Lots, Security Lighting, Ceiling Lighting

Features:



- Adjustable 120/96/72W
- Adjustable 3CCT 3000K/4000K/5000K
- Includes Dusk to Dawn Photocell Sensor with on/off Switch
- Can be Wall or Post Mounted.
- Rugged Corrosion Resistant Cast Aluminum Housing
- Poly Carbonate Lens
- IP65 Outdoor Wet Location

ADJUSTABLE LIGHT COLOR



ADJUSTABLE WATT

120 WATTS	15,600 LUMENS
96 WATTS	12,480 LUMENS
72 WATTS	9,360 LUMENS

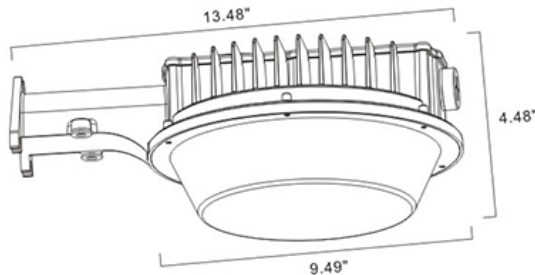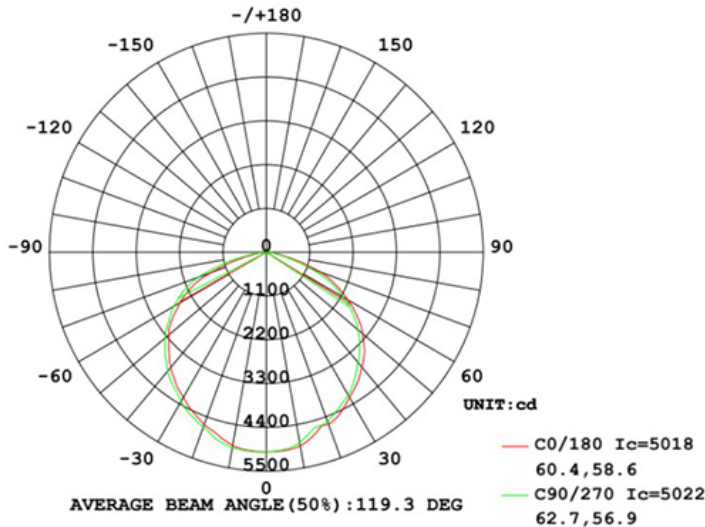

Specification:

Input Line Voltage:	120/277VAC
Input Power	120/96/72W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C/-40°F
Maximum Operating Temp	40°C/104°F
CCT	3000K/4000K/5000K
CRI	≥70
Lumens	15600/12480/9360
CBCP	5025

Height	Eavg, Emax	Angle: 118.50deg	Diameter
1m	1233, 5091lx		336.14cm
2m	308.3, 1273lx		672.28cm
3m	137.0, 565.7lx		1008.41cm
4m	77.08, 318.2lx		1344.55cm
5m	49.33, 203.6lx		1680.69cm
6m	34.26, 141.4lx		2016.83cm
7m	25.17, 103.9lx		2352.97cm
8m	19.27, 79.5lx		2689.10cm
9m	15.23, 62.8lx		3025.24cm
10m	12.33, 50.9lx		3361.38cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LWP100YP-BZ/CCT	120/96/72Watt LED Area/Barn Light Bronze Color, Adjustable 3CCT W/Photocell	120/96/72W	15600/12480/9360

* 5 Years Limited Warranty

UPC: 80680215601-9

