

LED TECHNOLOGY

50,000 Hours Life, 120/90/60 Watt, 120-277VAC 50/60Hz

Applications:

Pathway, Wall, Security, Walkways, and Perimeter Lighting.

Features:

- Adjustable Wattage 120/90/60Watt
- Adjustable CCT 3000K, 4000K, and 5000K
- Photocell Included with Quick Disconnect
- 120/277 Dual Voltages
- Aluminum Rust Proof Body
- UL Certified Outdoor Wet Location
- Replaces 350W HID Unit
- Bronze, Power Coat Finish
- Polycarbonate Lens with UV Stabilization

ADJUSTABLE WATT


120 WATTS	16,680 LUMENS
90 WATTS	13,050 LUMENS
60 WATTS	9,120 LUMENS

ADJUSTABLE LIGHT COLOR

3000K WARM WHITE
4000K COOL WHITE
5000K DAY LIGHT




Luminous Intensity Distribution Curve

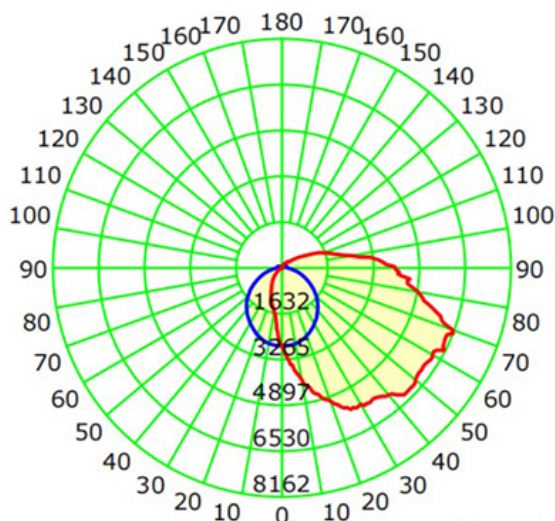


Average Diffuse Angle(50%): 105.0°

— C0-C180 — C90-C270

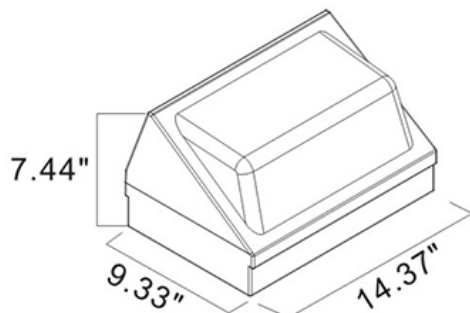

Specification:

Input Line Voltage:	120-277VAC
Input Power	120/90/60W
Input Line Frequency	50/60Hz
Luminaire Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C/-40°F
Maximum Operating Temp	45°C/113°F
Adjustable CCT	3000K/4000K/5000K
CRI	≥ 80
Lumens	16680/13050/9120
CBCP	6530

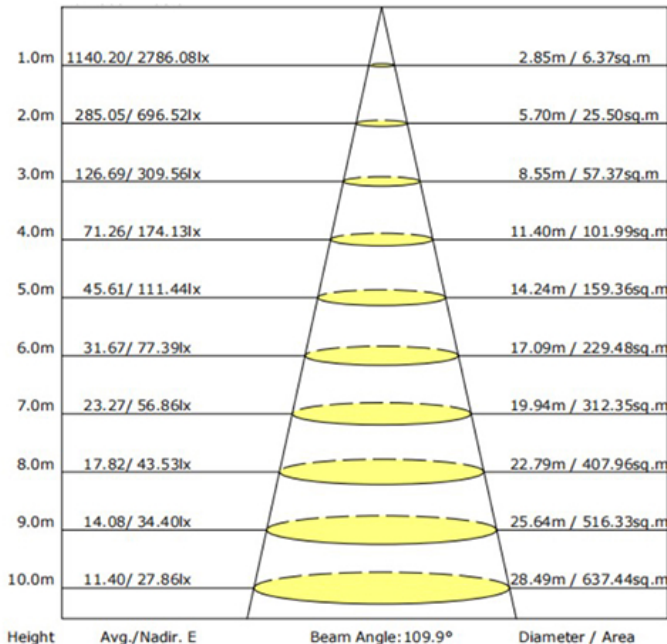

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LWP120FHZ/CCT	120/90/60 Watt LED Wall Pack Bronze Body, Adjustable CCT	120W 90W 60W	16680 13050 9120

*5 Year Limited Warranty

UPC: 680596-582939

