

LED TECHNOLOGY

50,000 Hours Life, 15 Watt, Dusk to Dawn Photocell

Applications:

Security, Entry Ways,
Stairways And Perimeter Areas,
As Well As Residential Exteriors.

Features:

- Adjustable 3CCT 3500K/4000K/5000K
- Dusk to Dawn Photocell Included(Removable)
- Polycarbonate Lens
- Self-Diagnostic, Self-Test Unit
- Die-Casting Aluminum Housing
- Daily use 15W/1775 Lumen Emergency
- Emergency Operation at 5W/700Lumen
- Emergency Illuminating Operation 90 Minute
- Rechargeable Ni-Cad Battery(Within 24 hours)
- Suitable For Outdoor Wet Location(IP65)
- 0-10V Dimmable

ADJUSTABLE
LIGHT COLOR

3500K
BRIGHT
WARM WHITE

4000K
COOL WHITE



5000K
DAY LIGHT



Specification:

Input Line Voltage:	120-277VAC
Input Power	15W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	40°C/104°F
CCT	3500K/4000K/5000K
CRI	≥80
Lumens	1775
CBCP	557

Luminous Intensity Distribution Curve

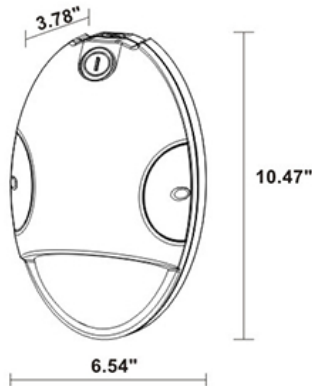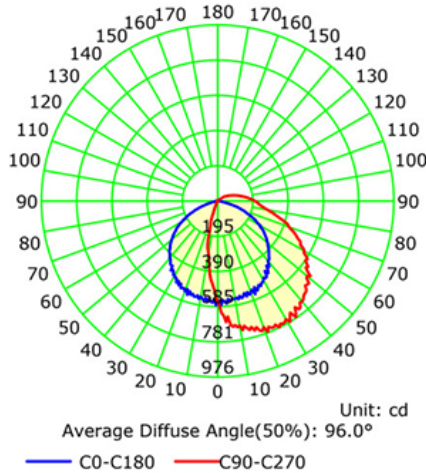

Height	Avg./Nadir. E	Beam Angle: 112.5°	Diameter / Area
1.0m	153.23/ 557.43lx		2.99m / 7.04sq.m
2.0m	38.31/ 139.36lx		5.99m / 28.16sq.m
3.0m	17.03/ 61.94lx		8.98m / 63.35sq.m
4.0m	9.58/ 34.84lx		11.97m / 112.62sq.m
5.0m	6.13/ 22.30lx		14.97m / 175.98sq.m
6.0m	4.26/ 15.48lx		17.96m / 253.40sq.m
7.0m	3.13/ 11.38lx		20.96m / 344.91sq.m
8.0m	2.39/ 8.71lx		23.95m / 450.50sq.m
9.0m	1.89/ 6.88lx		26.94m / 570.16sq.m
10.0m	1.53/ 5.57lx		29.94m / 703.90sq.m

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

* 2-YEAR

Model:#	Description	wattage	lumens
LWP12BZACEM-SDT/CCT	15Watt Hard Wire LED Light Bronze Body, With Photocell, and Emergency Back up	15W	1775

*Based on 4hours usage a day

UPC: 80680215629-3

