

LED TECHNOLOGY

50,000 Hours Life, 60/50/40 Watt, 120-277VAC 50/60Hz

Applications:

Pathway, Wall, Security, Walkways, and Perimeter Lighting.

Features:

- Adjustable Wattage 60/50/40Watt
- Adjustable CCT 3000K, 4000K, and 5000K
- Photocell Included with Quick Disconnect
- 120/277 Dual Voltages
- Aluminum Rust Proof Body
- UL Certified Outdoor Wet Location
- Replaces 150W HID Unit
- Bronze, Power Coat Finish
- Polycarbonate Lens with UV Stabilization

ADJUSTABLE LIGHT COLOR

3000K WARM WHITE
4000K COOL WHITE
5000K DAY LIGHT

ADJUSTABLE WATT


60 WATTS	7,920 LUMENS
50 WATTS	6,600 LUMENS
40 WATTS	5,280 LUMENS



Specification:


Input Line Voltage:	120-277VAC
Power:	60/50/40W
Input Line Frequency:	50/60Hz
Luminaire Life (Rated):	50,000hrs
Minimum Starting Temp:	-40°C/-40°F
Maximum Operating Temp:	45°C/113°F
CCT:	3000K/4000K/5000K
CRI:	≥80
Lumens:	7920/6600/5280
Power Factor 120/277V:	0.99/0.96
CBCP:	1352
Dimmable:	0-10V

Luminous Intensity Distribution Curve

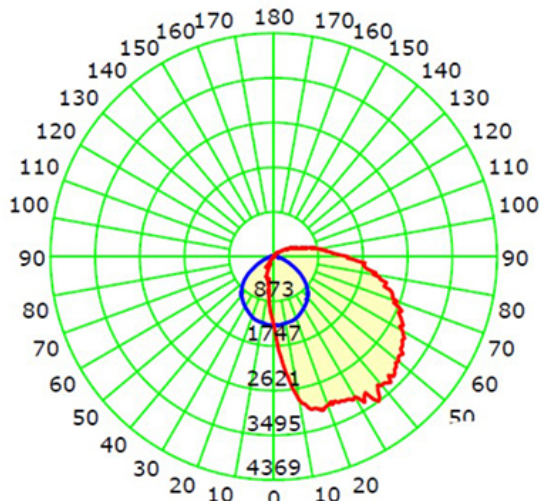


Average Diffuse Angle(50%)

— C0-C180 — C90-C270




9.92"

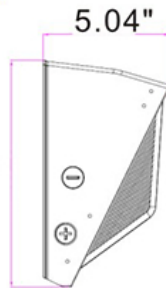

9.06"

5.04"

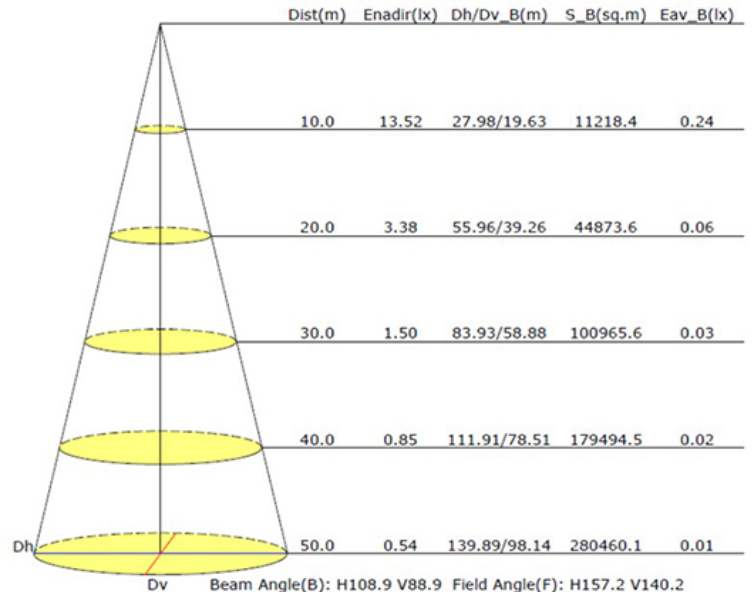

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Weight Without Any Accessories: 3.53 LB

WARRANTY
* 5-YEAR

Model:#	Description	wattage	lumens
LWP60FHZ/CCT	60/50/40 Watt LED Wall Pack Bronze Body, Adjustable CCT	60W 50W 40W	7920 6600 5280

* 5 Year Limited Warranty

UPC: 793573-749994

