

LED TECHNOLOGY

50,000 Hours Life, 75/50/35 Watt, 120-277VAC 50/60Hz

Applications:

Pole, Post Mount, Walkways, Roadways, Facade Lighting, Parks

Features:


- Adjustable Wattage 75W, 50W, and 35W
- Adjustable CCT 3000K, 4000K, and 5000K
- 75W LED Replaces a 250W HID or MH Unit
- IP65 Rated for Wet Locations
- Cold Forged Aluminum Body (Black Finish)
- 115 Degree Beam Angle
- Type 5 IES Light Distribution
- Powder Coated Black Finish
- Fits Maximum 3 inch pole or 2-3/8" Tenon
- 1-10V Dimmable



ADJUSTABLE LIGHT COLOR



Luminous Intensity Distribution Curve

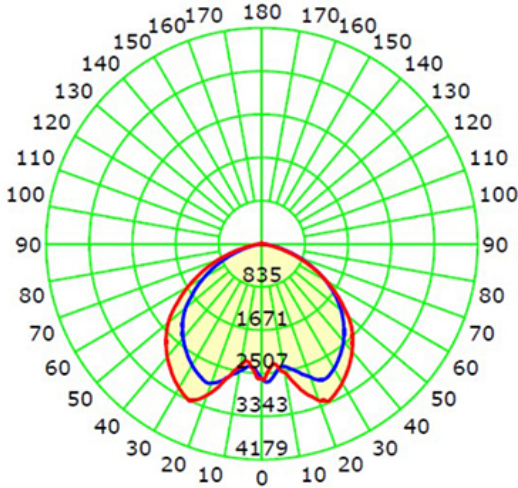


ADJUSTABLE WATT

75 WATTS	9,225 LUMENS
50 WATTS	6,150 LUMENS
35 WATTS	4,305 LUMENS

Specification:

Input Line Voltage	120-277VAC
Input Power	75/50/35W
Input Line Frequency	50/60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C/-40°F
Maximum Operating Temp	46°C/115°F
Adjustable CCT	3000K/4000K/5000K
CRI	>80
Lumens	9225/6150/4305
Beam Angle	115°
Dimmable	1-10V

Illuminance at a Distance

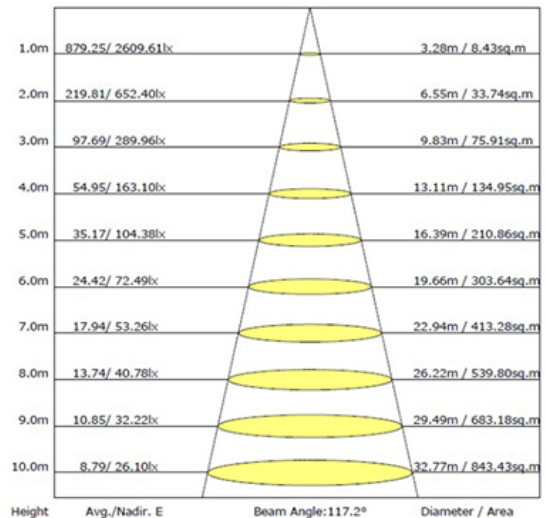

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Weight Without Any Accessories: 14.77 LB

Model:#	Description	Wattage	Metal Halide Equivalent	Lumens
PM75U2-BL/CCT	75/50/35 Watt LED Post Top Fixture Black Finish, Adjustable CCT	75/50/35W	250W	9225/6150/4305

*5 Year Limited Warranty

UPC: 80680215630-9

