


LED
TECHNOLOGY

50,000 Hours Life, 75/63/54Watt, 100 or 277VAC 60Hz

Applications:

Used to Retrofit Metal Halide and HPS Lamps in Fixtures.

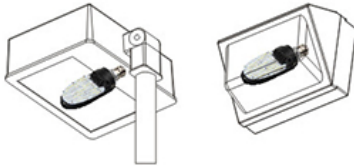


ADJUSTABLE WATT

75 WATTS	8,600 LUMENS
63 WATTS	7,200 LUMENS
54 WATTS	6,200 LUMENS

Features:

- Replace 250W HID Lamp
- Instant On High Power LED Bulb Last Up To 50,000 Hours
- Bypass Transformer and Direct Connect to 120-277Volt
- Extruded/Cut Aluminum Body For High Heat Dissipation
- Ratcheting E39 Base


Luminous Intensity Distribution Curve

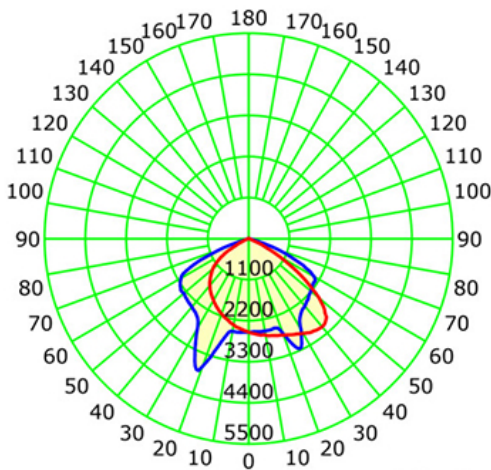

Unit: cd

Average Diffuse Angle(50%): 111.9°

— C0-C180 — C90-C270

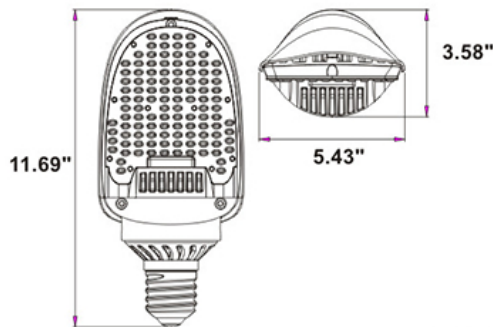


WARRANTY

2-YEAR*

Specification:

Input Line Voltage:	100-277VAC
Input Power	75/63/54W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	45°C/113°F
CCT	5000K
CRI	≥70
Lumens	8600/7200/6200
Viewing Angle	90°/150
IP Rating	51
CBCP	4400
Dimmable	0-10V

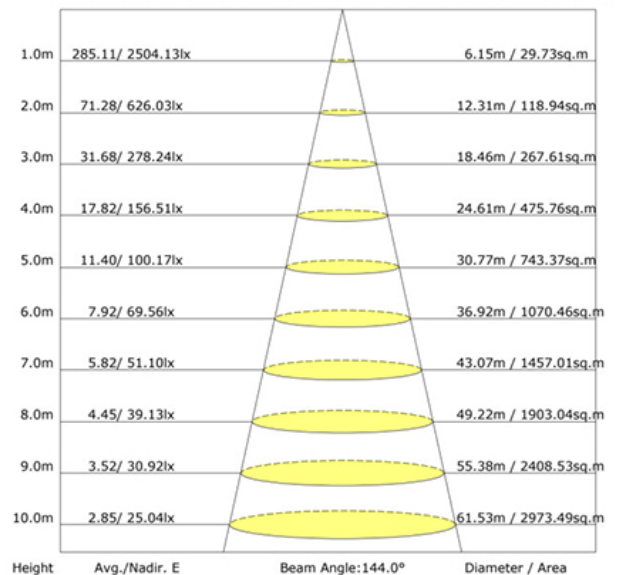

6 KV SURGE PROTECTION

Model:#	Description	Wattage	Lumens	Base
LB54HCB/850	75/63/54W LED Retrofit Lamp, IP51 5000K Day Light	75/63/54W	8600/7200/6200	E39

* 2 Year Limited Warranty

UPC: 806802155029