

## LED TECHNOLOGY

50,000 Hours Life, 25/30/40Watt, 120-277V 50/60Hz

### Applications:

Garages, Carports, Walk Ways, Warehouse, Retail Stores, Restrooms, Commercial Buildings, Airplane Hangers

### Features:

- Adjustable 3CCT Color 3500K, 4000K, 5000K
- Adjustable Watt 25/30/40 Watt
- 0-10V dimmable
- Steel body. Post painted
- Easy fit polycarbonate lens
- Battery Backup and Motion Sensor (Sold Separately)
- Motion sensor can be programmed to run at dimmed Output then full power when sensor triggered
- Accessories sold separately

### Accessories:

#### Motion Sensor



Add MS at end of model  
(ST-XS-MS used)

#### Battery Backup





Add BK at end of model  
(BK801 used)



### Specification:

Input Line Voltage:	120-277VAC
Adjustable Power	25/30/40W
Input Line Frequency	50/60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-21°C/-6°F
Maximum Operating Temp	54°C/130°F
Adjustable CCT	3500K/4000K/5000K
CRI	≥80
CBCP	1364
Beam Angle	120°
Lumens	3250/3900/5200
Dimmable	10% 0-10V

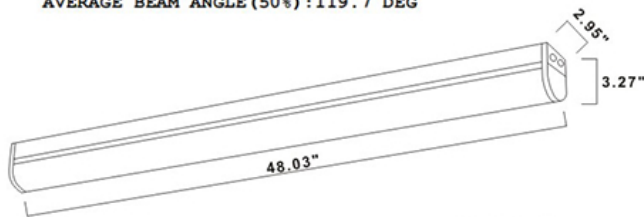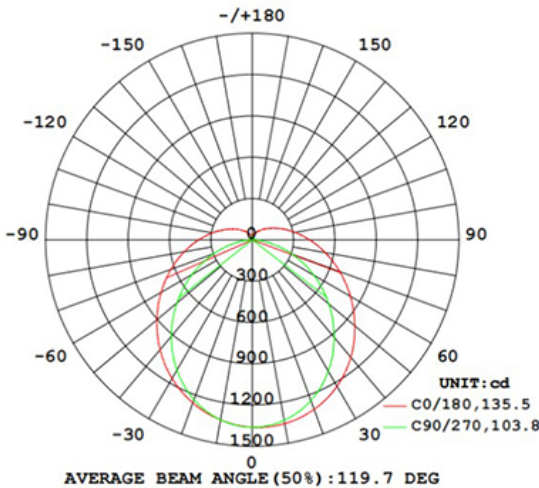

Height	Eavg, Emax	Angle: 103.81deg	Diameter
3.048m	53.91, 146.61x		777.62cm
3.658m	37.44, 101.81x		933.15cm
4.877m	21.06, 57.261x		1244.20cm
6.096m	13.48, 36.651x		1555.25cm
9.144m	5.990, 16.291x		2332.87cm
10.67m	4.401, 11.971x		2721.69cm
12.19m	3.370, 9.1621x		3110.50cm
13.72m	2.662, 7.2391x		3499.31cm
15.24m	2.157, 5.8641x		3888.12cm
16.76m	1.782, 4.8461x		4276.94cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### WARRANTY

5-YEAR \*

Weight: 2.87 lb

Model:#	Description	wattage	lumens
ST48234S-LED/CCT	4 Ft Strip Light Fixture, Adjustable Watt & CCT	25/30/40	3250/3900/5200

\*5 Years Limited Warranty

UPC: 74616080011-0

